



## ***DKA80-Q HAMMER***

- ✓ ***QL80 SHANK DESIGN***
- ✓ ***NEW GENERATION***
- ✓ ***SUPERIOR TECHNOLOGY***
- ✓ ***STANDARD BIT DIAMETERS, 7-7/8"-10-5/8"***
- ✓ ***DELIVERS MORE ENERGY PER BLOW***
- ✓ ***HARDENED PISTON FOR EXTENDED LIFE***
- ✓ ***INNOVATIVE DESIGN FOR MAXIMUM PERFORMANCE WITH MINIMUM MAINTENANCE***

**DRILL KING INTERNATIONAL**


**820 Sixth Avenue ♦ Mansfield, TX 76063 ♦ USA**

**Main#: 817-539-2500 ♦ Fax#: 682-222-1050**

**Sales#: 817-539-2501 ♦ Toll Free#: 866-900-2487**

**[sales@drillking.net](mailto:sales@drillking.net) ♦ [www.drillking.net](http://www.drillking.net)**

*The newest generation of Drill King Hammers means faster penetration, longer life, and less down time due to down hole failures.*

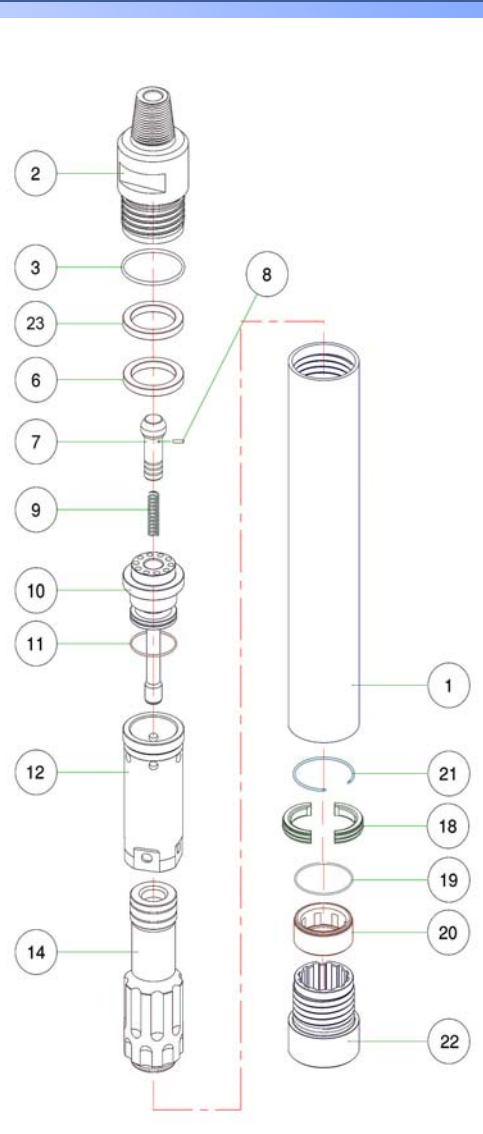

No.	NOMENCLATURE	Qty	Part Number
<b>HAMMER ASSEMBLY (QL80)</b>			<b>HADK-A80-Q</b>
1	WEAR SLEEVE	1	HPDK-A8001-Q
2	TOP SUB	1	HPDK-A8002
3	TOP SUB O-RING	1	HPDK-A8003
6	MAKE UP RING	1	HPDK-A8006
7	CHECK VALVE	1	HPDK-A8007
8	CHOKE SET	1	HPDK-A8008
9	C.V. SPRING	1	HPDK-A8009
10	AIR DISTRIBUTOR	1	HPDK-A8010
11	AIR DIS. O-RING	1	HPDK-A8011
12	CYLINDER	1	HPDK-A8012
14	PISTON	1	HPDK-A8014-Q
18	BIT RET. RING	1	HPDK-A8018-Q
19	BIT RET. RING O-RING	1	HPDK-A8019
20	BIT BEARING	1	HPDK-A8020-Q
21	SNAP RING	2	HPDK-A8021
22	DRIVE SUB	1	HPDK-A8022-Q
23	PRESS RING	1	HPDK-A8023

Drilling Parameters	
Working Pressure	150-350
Application Bit	7-7/8-10-5/8"
Feed Force (lbs.)	2000-5000

Air Consumption at Different Working Pressures	
150 psi (scfm)	620
250 psi (scfm)	1025
350 psi (scfm)	1580

Dimensions & Weights	
TOP SUB : 4-1/2" API PIN	
Tool Length (in)	55.1
Outside Dia. (in)	7.16
Stroke (in)	4.00
Weight w/o Bit (lbs)	405
Piston Weight (lbs)	84

Nothing contained in this brochure is intended to extend any warranty or representation for applications expressed or implied, regarding the products described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Drill King's standard terms and conditions of sale for such products, which are available upon request.